



Technical data



3.5 INCH
DISPLAY



750 NIT
DAYLIGHT
VIEWABLE



130° / 110°
VIEWING
ANGLE



NMEA
2000



IP 67
INGRESS
PROTECTION



+ 70°
- 40°
OPERATING
TEMP



2 X
CAN BUS

Tohatsu Outboard Engine Monitor

PLUG AND PLAY ENGINE MONITORING DIGITAL DISPLAY COMPATIBLE WITH ANY TOHATSU OUTBOARD 60HP AND ABOVE CONNECTING VIA TOHATSU NMEA 2000 NETWORK.

Users can select screens to show standard Tohatsu engine data parameters as required such as RPM, trim, coolant, temperature, battery voltage, engine hours, fuel level and burn rate, as well as triggered alarms.

Additionally boat speed and heading can be shown if GPS data is available on the NMEA2000 network.

This simple out of the box solution needs no configuration and individual customisation is easily applied within the display menus.

KEY FEATURES:

- > 3.5" Colour Digital Display with software pre-installed
- > Tohatsu Outboard Engine Compatible
- > NMEA 2000 Communications
- > All Common Engine Parameters Shown
- > All Triggered Alarms Shown
- > Ruggedised Low Profile Housing
- > IP66 Front and IP67 Rear
- > Plug and Play Installation

ACCESSORIES:

- > NMEA 2000 cable harness and manual
- > GPS sensor (optional)
- > UV protective cover




Sample Screens (Version No. 05)




Dimensions (Part No. 3517)


FRONT VIEW

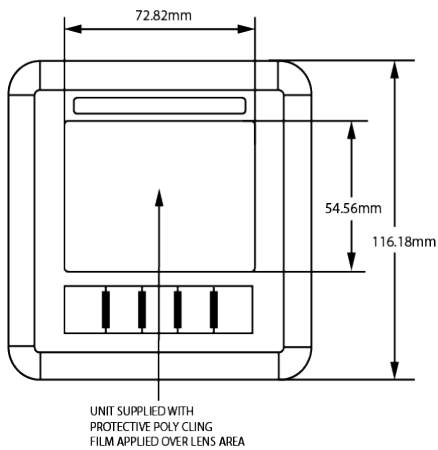

SIDE VIEW

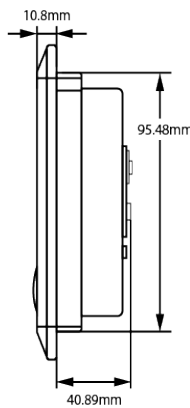

REAR VIEW

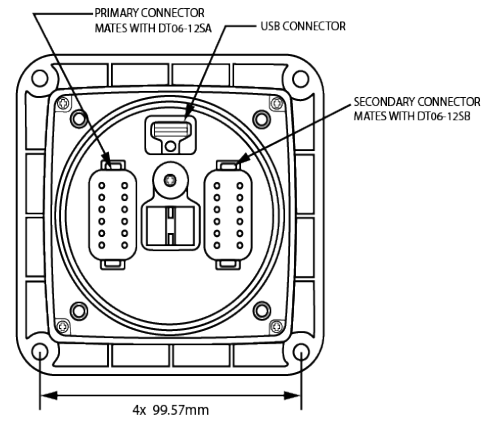

Connector Diagram

